




Anwendungen / Application

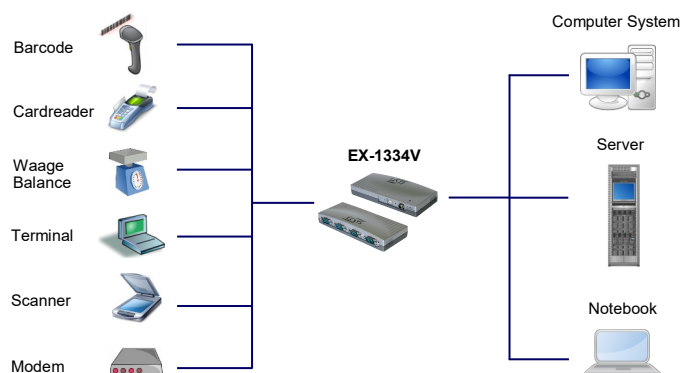

USB zu 4S Serielle RS-232 Ports Plastik-Gehäuse, verschraubbar (FTDI)

Beschreibung

Die EX-1334V USB zu Seriell RS-232 in einem Plastik-Gehäuse, stellt vier Serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Sie ist entwickelt worden um vier weitere Serielle Ausgänge in einem robustem Metallgehäuse für Desktop Computer oder Notebook über den USB 1.1 oder 2.0 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und der Artikel EX-1334V kann bei laufendem Betrieb installiert werden. Das mitgelieferte Kabel EX-K1542V A-Stecker auf B-Stecker kann ohne Schraubenzieher an der EX-1334V mit Rändelschrauben befestigt werden. Das Kabel kann sich somit nicht mehr von alleine lösen.

Merkmale

- Schnittstelle: RS-232 V.24
- FIFO Buffer: 16C550 mit 16Byte
- I/O Adressen und Interrupt: werden vom Betriebs System vergeben
- Daten Bits: 7 und 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Stromversorgung vom USB Bus (Bus Power) oder Netzteil zum verschrauben
- Plastik-Gehäuse

Spezifikationen

- **Chip-Set:** FTDI
- **Datentransfer-Rate:** 300 Baud bis 921.6KBaud
- **Anschlüsse:** 1 x B-Buchse Upstream verschraubbar
4 x 9 Pin Seriell RS-232 Stecker
1 x DC Jack verschraubbar
- **Hardwaresysteme:** USB 1.1 oder 2.0 Ports
- **Treiber:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)
Win Server 200x & 20xx/ WinCE, Linux, Mac OS 10.x
- **Betriebstemperatur:** 0°C bis 55° Celsius
- **Lagertemperatur:** -40°C bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** Vom USB Port
- **Abmessung:** 150.00 x 66.00 x 26.00 mm
- **Gewicht:** 600g
- **Lieferumfang:** EX-1334V, USB Kabel (EX-K1542V), Treiber CD, Handbuch



USB to 4S Serial RS-232 ports Plastic box, screw lock (FTDI)

Description

The EX-1334V USB to serial RS-232 in a plastic box, provides four high performance 16C550-type UART compatible RS-232 serial ports. It is designed for PC or Notebooks to provide instant COM port expansion in a robust metal case through the USB 1.1 or 2.0 bus. With the easy installation you don't need to open the computer system and install the EX-1334V when the system run. With the included USB cable EX-K1542V A-male to B-male you can fix the connector with screw. The cable can't be disconnect any more by him self.

Features

- Interface: RS-232 V.24
- FIFO Buffer: 16C550 with 16Byte
- I/O addresses and Interrupt: Set from the operating system
- Data Bits: 7 und 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Power from the USB Bus (Bus Power) or with screw lock power supply
- Plastic box

Specification

- **Chip-Set:** FTDI
- **Data transfer rate:** 300 Baud up to 921.6KBaud
- **Connectors:** 1 x B-female Upstream connector screw lock
4 x 9 pin serial RS-232 connector
1 x DC Jack screw lock
- **Hardware system:** USB 1.1 or 2.0 ports
- **Driver:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)
Win Server 200x & 20xx/ WinCE, Linux, Mac OS 10.x
- **Operating Temperature:** 32°F up to 131° Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** From the USB port
- **Size:** 150.00 x 66.00 x 26.00 mm
- **Weight:** 600g
- **Packaging contents:** EX-1334V, USB cable (EX-K1542V), Driver CD, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging

