




# EX-6682

## FireWire 1394A



### Anwendung / Application

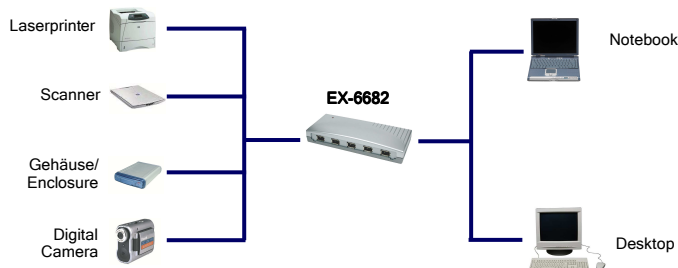

## HUB FireWire 1394A mit 6 Ports



## HUB FireWire 1394A with 6 ports

### Beschreibung

Die EX-6682 kann als FireWire 1394A HUB oder als Leitungsverstärker eingesetzt werden.

### Description

The EX-6682 can be use for a 6 port FireWire 1394A HUB or for a active Extended Box.

### Merkmale

- 6 Port FireWire 1394 HUB
- Hot Plug and Play
- Unterstützt Power auf P1394Bus

### Features

- 6 Port FireWire 1394 Hub
- Hot Plug and Play
- Support on the P1394 Bus

### Spezifikationen

- **Datentransfer-Rate:** bis 400Mbps (500MB/Sek.)
- **Anschlüsse:** 6 x 6 Pin FireWire 1394A  
1 x DC Anschluss 12V
- **Hardwaresysteme:** FireWire 1394A
- **Treiber:** Es werden keine Treiber benötigt
- **Betriebstemperatur :** 0<sup>0</sup> bis 55<sup>0</sup> Celsius
- **Lagertemperatur:** -40<sup>0</sup> bis 75<sup>0</sup> Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 150 x 70 x 30 mm
- **Gewicht:** 350g
- **Lieferumfang:** EX-6682, FireWire Kabel 6 auf 6 Pin,  
1 x Netzteil 12V/3A, Handbuch

### Specifications

- **Data transfer rate:** up to 400Mbps (500MB/Sec.)
- **Connectors:** 6 x 6 pin FireWire 1394A  
1 x DC 12V connector
- **Hardware system:** FireWire 1394A
- **Driver:** Don't need driver
- **Operating Temperature :** 32<sup>0</sup> till 131<sup>0</sup> Fahrenheit
- **Storage Temperature:** -40<sup>0</sup> till 167<sup>0</sup> Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 150 x 70 x 30 mm
- **Weight:** 350g
- **Packaging contents:** EX-6682, FireWire cable 6 to 6 pin,  
1 x Power Supply 12V/3A, Manual

### System / OS



### Geprüft / Approved



### Verpackung / Packaging

