




Anwendungen / Application



PCI 4S Seriell RS-232 Karte mit Octopus Kabel (MosChip Chip-Set)

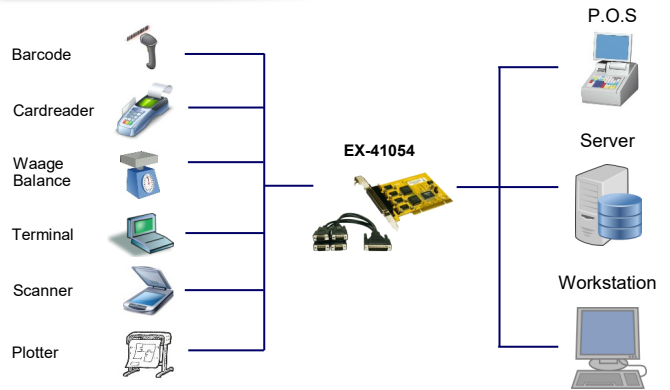

PCI 4S Serial RS-232 board with Octopus cable (MosChip Chip-Set)

Beschreibung

Die EX-41054 PCI I/O Karte stellt vier serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Sie ist entwickelt worden um vier weiteren Seriellen Ports für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. Die Karte ist voll Plug-and-Play kompatibel. Die EX-41054 hat vier innenliegende 10 Pin Pfostenstecker für internen Anschluss.

Description

The EX-41054 PCI I/O adapter provides four high performance 16C550-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible. The EX-41054 has four internal 10 pin pole plug for connect internal device.

Merkmale

- Schnittstelle: RS232 V.24
- FIFO Buffer: 16C550 mit 256Byte
- ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's
- I/O Adressen und Interrupt wird vom System BIOS vergeben
- Daten Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Unterstützt Motherboard mit 5V und 3.3V

Features

- Interface: RS232 V.24
- FIFO Buffer: 16C550 with 256Byte
- ±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
- I/O addresses and Interrupt will set from the system BIOS, IRQ sharing
- Data Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Support Motherboard with 5V and 3.3V

Spezifikationen

- **Chip-Set:** MosChip MCS9845CV
- **Datentransfer-Rate:** 300Baud bis 115.2KB
- **Anschlüsse:** 4 x 9 Pin Seriell-Stecker (mit Octopus Kabel)
4 x Interner 10 Pin Pfosten-Stecker
- **Hardwaresysteme:** PCI 32-Bit und PCI-X 64-Bit Slot
- **Betriebssysteme:** DOS, Win9.x/ME/2000/XP/Vista/7/8.x/10 (32&64)
Server 200x & 2012 R2, Linux
- **Betriebstemperatur :** 0°C bis 55°C Celsius
- **Lagertemperatur:** -40°C bis 75°C Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 120 x 76 mm
- **Gewicht:** 400g
- **Lieferumfang:** EX-41054, Octopus Kabel, CD, Handbuch

Specification

- **Chip-Set:** MosChip MCS9845CV
- **Data transfer rate:** 300Baud up to 115.2KBaud
- **Connectors:** 4 x 9 pin male connector (with Octopus cable)
1 x Internal 10 pin pole plug
- **Hardware system:** PCI 32-Bit und PCI-X 64-Bit Slot
- **Operating systems:** DOS, Win9.x/ME/2000/XP/Vista/7/8.x/10 (32&64)
Server 200x & 2012 R2, Linux
- **Operating Temperature :** 32°F up to 131° Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 120 x 76 mm
- **Weight:** 400g
- **Packaging contents:** EX-41054, Octopus cable, CD, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging

