


### Anwendungen / Application



## 2P PCIe Parallel EPP/ECP Karte inkl. LP Bügel (MosChip Chip-Set)

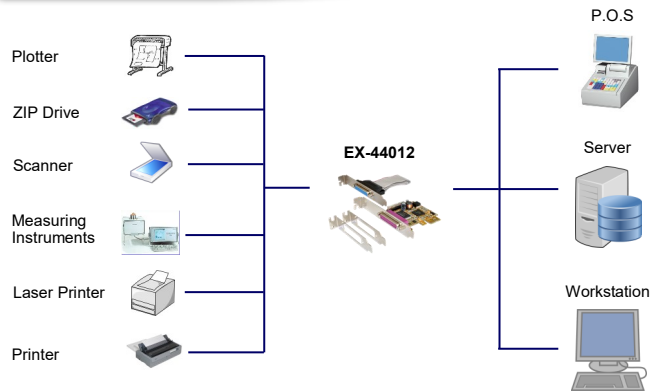

## 2P PCIe Parallel EPP/ECP board incl. LP bracket (MosChip Chip-Set)

### Beschreibung

Die EX-44012 PCI-Express Parallel Karte stellt einen Parallelen SPP/EPP/ECP High Performance Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Parallelen Ausgang für PC, kleine Workstation oder Server über den PCIe Bus zu erweitern. Mit der EX-44012 bestehen keine IRQ und I/O-Adressen Probleme und sie ist PCIe Plug-and-Play-Kompatibel ist. Mit der EX-44012 werden zwei Low Profile Bügel mitgeliefert für schmale PC Gehäuse.

### Description

The EX-44012 PCI-Express Parallel adapter provides one SPP/EPP/ECP high performance port. It is designed for PC, thin client or server to provide instant LPT port expansion via the PCIe Bus. The card is fully Universal PCIe Plug-and-Play compatible and there are no IRQ and I/O address configuration problems. With the EX-44012 we included two Low Profile Bracket for small computer case.

### Merkmale

- PCI-Express x1 Parallel Karte mit zwei Anschlüssen
- Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port) ECP (Enhanced Capacity Port)
- I/O Adressen und Interrupt wird vom Betriebs System vergeben, IRQ Sharing
- PCIe Schnittstelle kompatibel zu Rev. 1.0a bis 3.0 Spezifikation
- Low Profile Bügel wird mitgeliefert

### Features

- PCI-Express x1 Parallel card with two ports
- Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port)
- I/O addresses and Interrupt setting from the operating system, IRQ sharing
- Fully compliant with PCIe Base Specification Rev. 1.0a to 3.0
- Low Profile its included

### Spezifikationen

- **Chip-Set:** MosChip MCS9815CV
- **Datentransfer-Rate:** 2Mbyte/Sek.
- **Anschlüsse:** 2 x 25 Pin D-SUB Parallel Buchse
- **Hardwaresysteme:** PCIe Slot x1 bis x16
- **Treiber:** DOS, Win98/ ME/ NT 4.0/ 2000/ XP/ Vista/ 7/ 8.x/10 (32&64) Server 200x & 2012R2, Linux
- **Betriebstemperatur :** 0°C bis 55° Celsius
- **Lagertemperatur:** -40° bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 3,3 Volt über PCIe Slot
- **Abmessung:** 65 x 58 mm
- **Gewicht:** 300 g
- **Lieferumfang:** EX-44012, 1 x Slot Kabel, 2 x Low Profile Bügel, Treiber CD, Handbuch

### Specification

- **Chip-Set:** MosChip MCS9815CV
- **Data transfer rate:** 2Mbyte/Sec.
- **Connectors:** 2 x 25 pin D-SUB female connector
- **Hardware system:** PCIe Slot x1 to x16
- **Driver:** DOS, Win98/ ME/ NT 4.0/ 2000/ XP/ Vista/ 7/ 8.x/10 (32&64) Server 200x & 2012R2, Linux
- **Operating Temperature :** 32°F up to 131° Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 3.3 Volt via PCI-express slot
- **Size:** 65 x 58 mm
- **Weight:** 300 g
- **Packaging contents:** EX-44012, 1 x Slot cable, 2 x Low Profile bracket, Driver CD, Manual

### System / OS



### Geprüft / Approved



### Verpackung / Packaging

