


Bild / Picture

Anwendung / Application

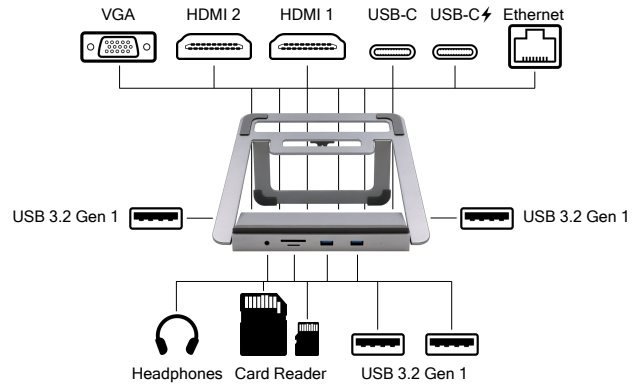

12-in-1 USB-C Docking Station mit Notebook-Stand

12-in-1 USB-C Docking Station with Notebook-Stand

Beschreibung

Description

Die EX-1223HM ist eine 12-in-1 USB-C Dockingstation mit integrierter Standfunktion, die den Notebook-Bildschirm auf eine angenehme Arbeitshöhe bringt. Die vielseitigen Anschlussmöglichkeiten ermöglichen den Anschluss für alle Ihre Peripheriegeräte. Dank MST Unterstützung können unterschiedliche Inhalte auf bis zu 3 Bildschirmen dargestellt werden. USB-C Power Delivery (PD) ermöglicht es, das bestehende Notebook-Netzteil direkt an der EX-1223HM anzuschließen.

The EX-1223HM is a 12-in-1 USB-C docking station with built-in stand function that brings your notebook screen to a comfortable working height. The versatile connectivity options allow you to connect for all your peripherals. MST support allows different content to be displayed on up to 3 screens. USB-C Power Delivery (PD) allows you to connect your existing notebook power supply directly to the EX-1223HM.

Merkmale

Features

<ul style="list-style-type: none"> • 12 in 1 Dockingstation mit integriertem Notebookständer 	<ul style="list-style-type: none"> • 12 in 1 docking station with integrated notebook stand
<ul style="list-style-type: none"> • Langlebiges und elegantes Aluminiumdruckguss-Gehäuse 	<ul style="list-style-type: none"> • Durable and elegant aluminum alloy case
<ul style="list-style-type: none"> • Unterstützt USB-C PD Ladefunktion bis 100W 	<ul style="list-style-type: none"> • Supports USB-C PD charging up to 100W
<ul style="list-style-type: none"> • 2x HDMI (4k@30Hz), 1x VGA (FullHD) 	<ul style="list-style-type: none"> • 2x HDMI (4k@30Hz), 1x VGA (FullHD)
<ul style="list-style-type: none"> • Unterstützt Multi Stream Transport (MST) für bis zu 3 Bildschirme mit unterschiedlichen Inhalten (MacOS: nur gleicher Inhalt möglich) 	<ul style="list-style-type: none"> • Supports Multi Stream Transport (MST) for up to 3 screens with different content (macOS: only same content possible)
<ul style="list-style-type: none"> • Gigabit Ethernet RJ45-Port 	<ul style="list-style-type: none"> • Gigabit Ethernet RJ45-Port
<ul style="list-style-type: none"> • 4x USB 3.2 Gen 1, 1x USB-C PD-Port, 1x USB-C Notebook-Port 	<ul style="list-style-type: none"> • 4x USB 3.2 Gen 1, 1x USB-C PD port, 1x USB-C notebook port
<ul style="list-style-type: none"> • Kartenleser für SD/SDHC/SDXC und microSD/SDHC/SDXC 	<ul style="list-style-type: none"> • Card reader for SD/SDHC/SDXC and microSD/SDHC/SDXC
<ul style="list-style-type: none"> • Für Notebooks/MacBooks mit USB-C Anschluss (DP Alt Mode) 	<ul style="list-style-type: none"> • For Notebooks/MacBooks with USB-C port (DP Alt Mode)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Datentransfer-Rate:	120Mbps bis 5Gbps	Data transfer rate:	120Mbps up to 5Gbps
Anschlüsse:	1x C-Buchse Upstream 1x C-Buchse Power (PD) 4x USB 3.2 Gen 1 A-Buchse 2x HDMI 4K@30Hz 1x VGA Full-HD 1x 3.5 mm Klinke Audio-Ausgang 1x SD-Slot, 1x micro SD-Slot	Connectors:	1x C-Female Upstream 2 x C-Female Power (PD) 4x USB 3.2 Gen 1 A socket 2x HDMI 4K@30Hz 1x VGA Full-HD 1x 3.5 mm jack audio output 1x SD slot, 1x micro SD slot
Hardwaresysteme:	USB 3.2 Gen 1	Hardware system:	USB 3.2 Gen 1
Treiber:	Benötigt keine Treiber (Standard HUB)	Driver:	No driver necessary (Standard HUB)
Betriebssysteme:	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x	Operating systems:	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-20°C bis +85°C Celsius	Storage temperature:	-20°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+5V	Current Supply:	+5V
Abmessung:	220.00 x 250.00 x 25.00 mm	Size:	220.00 x 250.00 x 25.00 mm
Gewicht:	118 g	Weight:	118 g
EAN:	4718359012235	EAN:	4718359012235
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-1223HM, Handbuch	Packaging contents:	EX-1223HM, Manual

Bilder / Picture

