


Figura / Picture



4-Port USB 3.1 Gen2 HUB
(Custodia in plastica)

Applicazione / Application

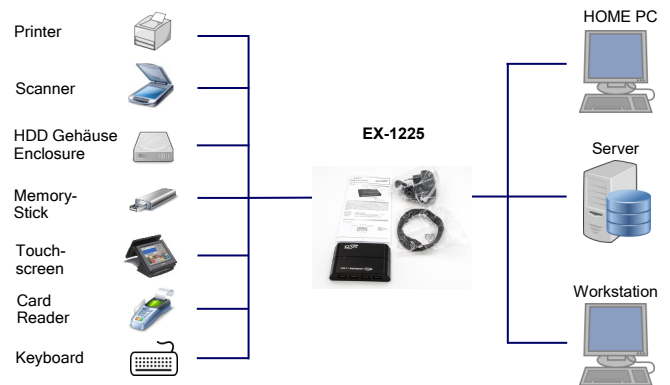

4-Port USB 3.1 Gen2 HUB
(Plastic housing)

Descrizione

Con EX-1225 è possibile espandere un'uscita USB 3.1 Gen2 da un notebook o desktop a 4 porte USB 3.1 Gen2 aggiuntive con connettori A. È quindi possibile collegare fino a quattro periferiche USB 2.0, 3.0 o 3.1 Gen2 esterne a una porta USB 3.1 Gen2 con una connessione C di notebook o computer desktop. È molto compatto ed è incluso un alimentatore. Può essere alimentato tramite bus USB o tramite l'alimentatore 5V / 2A in dotazione. La presa da adattatore C a spina A (EX-47991) è disponibile come opzione.

Description

With the EX-1225 you can expand a USB 3.1 Gen2 output from notebook or desktop computer to 4 additional USB 3.1 Gen2 ports with A-connectors. It is thus possible to connect up to four external USB 2.0, 3.0 or 3.1 Gen2 peripherals to one USB 3.1 Gen2 port with C-connector of notebooks or desktop computers. It is very compact and a power supply is included. It can be supplied with USB bus power or via the included 5V/2A power supply. The adapter C-female to A-male (EX-47991) is available as an option.

Caratteristiche

Features

<ul style="list-style-type: none"> • USB 3.1 Gen2 HUB con 4porte Downstream USB 3.1 Gen2 	<ul style="list-style-type: none"> • USB 3.1 Gen2 HUB with four downstream USB 3.1 Gen2 ports
<ul style="list-style-type: none"> • Alimentatore +5V / 2A mediante DC-Jack 	<ul style="list-style-type: none"> • Power +5V / 2A over the DC-Jack
<ul style="list-style-type: none"> • Alimentatore opzionale anche da USB-BUS+5V (Bus-Power) 	<ul style="list-style-type: none"> • Power supply optionally also from the USB-BUS +5V (Bus-Power)
<ul style="list-style-type: none"> • Piedini in gomma per una presa salda sul tavolo 	<ul style="list-style-type: none"> • Rubber studs for a firm hold on the table
<ul style="list-style-type: none"> • Rilevamento automatico della velocità di trasferimento dei dati per le periferiche collegate 	<ul style="list-style-type: none"> • Automatic recognition the data transfer rate for the attached external devices
<ul style="list-style-type: none"> • 900 mA di corrente massimo su tutte le 2 porte 	<ul style="list-style-type: none"> • 900mA current on maximal 4 ports
<ul style="list-style-type: none"> • Custodia in plastica robusta 	<ul style="list-style-type: none"> • Rugged plastic case
<ul style="list-style-type: none"> • 1 x LED display per tensione 	<ul style="list-style-type: none"> • 1 x LED Power Display

System / OS

Approvato / Approved

Confezione / Packaging



Caratteristiche

Specification

Chip-Set:	VIA VL820-Q2	Chip-Set:	VIA VL820-Q2
Trasferimento Dati:	120Mbps sino 10Gbps	Data transfer rate:	120Mbps up to 10Gbps
Attacchi:	1 x C-Femmina Upstream 4 x A-Femmina Downstream 1 x 5V / 2A Connettore rete	Connectors:	1 x C-Female Upstream 4 x A-Female Downstream 1 x 5V /2A Power connector
Sistema Hardware:	USB 2.0 a 3.1 Gen2	Hardware system:	USB 2.0 up to 3.1 Gen2
Driver:	Non necessita di Driver (Standard HUB)	Driver:	No driver necessary (Standard HUB)
Sistemi Operativi:	Win7/ 8.x/ 10 (32&64-Bit)/ Server 20xx Linux 2.6.24 e 4.11.x oppure superiori, Mac OS 10.x	Operating systems:	Win7/ 8.x/ 10 (32&64-Bit)/ Server 20xx, Linux 2.6.24 and 4.11.x or higher, Mac OS 10.x
Temperatura Esercizio :	Da 0°C a +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Temperatura conservaz.:	Da -20°C fino a +85°C Celsius	Storage temperature:	-20°F up to 167°F Fahrenheit
Umidità	da 5% a 95%	Rel. Humidity:	5% to 95%
Alimentazione	5V / 2A Alimentatore	Current Supply:	5V / 2A Power Supply
Dimensione:	100.00 x 67.00 x 20.00 mm	Size:	100.00 x 67.00 x 20.00 mm
Peso:	390 g	Weight:	390 g
EAN:	4718359012259	EAN:	4718359012259
Origine articolo:	China	Country of origin:	China
Contenuto:	EX-1225, USB 3.1 Gen2 Kabel (1.0 metro), Alimentatore 5V/2A, Manuale	Packaging contents:	EX-1225, USB 3.1 Gen2 cable (1.0 meter), Power Supply 5V/2A, Manual

Immagini / Picture



Accessori / Accessories

EX-47991	Adattatore C-femmina a A-maschio / Adapter C-female to A-male)
EX-K1594-1.0	Cavo USB 3.1 Gen2 / Cable (A-C Connettore / A-C connector)



EX-47991