




Anwendung / Application

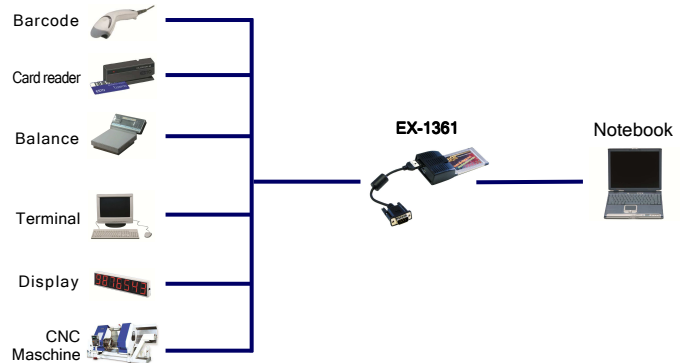

PCMCIA 1S Serielle RS-422/485, 32-Bit

Beschreibung

Die EX-1361 stellt einen Seriellen RS-422/485 High Performance UART 16C950 Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Serielle Port für Notebook über den 32-Bit PCMCIA Bus zu erweitern, um Serielle RS-422/485 Peripheriegeräte wie z.B. , Kassendrucker, CNC Maschine, Terminal usw. anzuschließen.

Merkmale

- Schnittstelle: RS-422/485 mit FIFO Buffer 16C950 und 128Byte
- I/O Adressen und Interrupt wird vom Betriebs System vergeben
- Daten Bits: 5, 6, 7, 8, 9
- Stop Bits: 1, 1.5, 2
- Parity: None, even, odd, space, mark
- Terminierung 120Ohm kann ein- und ausgeschaltet werden
- Signale: Drei Einstellungen sind möglich
 - 4-Draht RS-422 (TXD+/-, RXD+/-) (Full Duplex)
 - 2-Draht RS-485 (Data+/-, Data +/-) (Half Duplex)

Spezifikationen

- **Chip-Set:** Oxford OXCF950
- **Datentransfer-Rate:** 50 Baud bis 921.6KBaud
- **Anschlüsse:** 1 x 9 Pin D-SUB Seriell Stecker
- **Hardwaresysteme:** PCMCIA CardBus 16- und 32-Bit
- **Treiber:** Win9.x/ 2000/ NT 4.0/ ME/ XP/ Vista/ 7/ 8 (32&64bit) Server(2003&2008)/ Linux
- **Betriebstemperatur :** 0⁰ bis 55⁰ Celsius
- **Lagertemperatur:** -40⁰ bis 75⁰ Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 117 x 54 mm
- **Gewicht:** 300g
- **Lieferumfang:** EX-1361, 1 x Kabel mit 9 Pin, Treiber CD, Handbuch

System / OS



PCMCIA 1S Serial RS-422/485, 32-Bit

Description

The EX-1361 provides 1 high performance 16C950-type UART compatible RS-422/485 serial port. It is designed for Notebook to provide instant COM port expansion via the PCMCIA 32-Bit Bus to connect about serial RS-422/485 peripheral devices such P.O.S. System, CNC Machine, Terminal ect.

Features

- Interface: RS-422/485 with FIFO Buffer 16C950 and 128Byte
- I/O addresses and Interrupt it's setting from the operating system
- Data Bits: 5, 6, 7, 8, 9
- Stop Bits: 1, 1.5, 2
- Parity: None, even, odd, space, mark
- Termination 120 Ohm can enable / disable
- Signal: Three modes are selectable:
 - 4-Wire RS-422 (TXD+/-, RxD+/-) (Full duplex)
 - 2-Wire RS-485 (Data+/-, Data+/-) (Halfduplex)

Specifications

- **Chip-Set:** Oxford OXCF950
- **Data transfer rate:** 50 Baud up to 921.6KBaud
- **Connectors:** 1 x 9 pin D-SUB serial connector
- **Hardware system:** PCMCIA CardBus 16- and 32-Bit
- **Driver:** Win9.x/ 2000/ NT 4.0/ ME/ XP/ Vista/ 7/ 8 (32&64bit) Server(2003&2008)/ Linux
- **Operating Temperature :** 32⁰ up to 131⁰ Fahrenheit
- **Storage Temperature:** -40⁰ up to 167⁰ Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 117 x 54 mm
- **Weight:** 300g
- **Packaging contents:** EX-1361, 1 x Cable with 2 x 9 Pin, Driver CD, Manual

Geprüft / Approved



Verpackung / Packaging

