


Fig./Picture

Applicazione / Application



## Scheda 8S Seriali RS-232 PCI (FTDI Chip-Set)

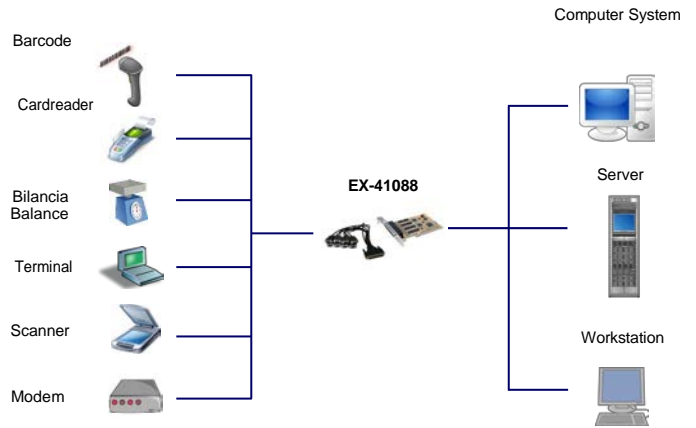

## 8S Serial RS-232 PCI card (FTDI Chip-Set)

### Descrizione

La scheda I/O PCI EX-41088 fornisce otto uscite seriali UART 16C550 ad alte prestazioni RS-232. È progettato per estendere otto porte seriali aggiuntive per PC, workstation di piccole dimensioni o server tramite il bus PCI o PCI-X. La scheda è completamente compatibile con il plug and play. Il cavo Octopus è incluso.

### Caratteristiche

- Interfaccia: RS-232 V.24
- ±15kV IEC1000-4-2 ESD protezione per RS 232 I/O's
- FIFO Buffer: 16C550 con 16Byte
- Indirizzi di I/O e interrupt: vengono assegnati dal sistema operativo
- Data Bits: 7 e 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Segnale RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

### Description

The EX-41088 PCI I/O adapter provides eight high performance 16C550-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible. The Octopus cable is included.

### Features

- Interface: RS-232 V.24
- ±15kV IEC1000-4-2 ESD protection for RS232 I/O's
- FIFO Buffer: 16C550 with 16Byte
- I/O addresses and Interrupt: Set from the operating system
- Data Bits: 7 and 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

### Specifiche

- **Chip-Set:** FTDI
- **Trasferimento dati:** 300 Baud bis 921.6KBaud
- **Attacchi:** 1 x 63 Pin Femmina  
8 x 9 Poli Seriali RS-232 Maschio (Cavo Octopus)
- **Sistema Hardware:** Slot PCI e PCI-X 32-Bit
- **Driver:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)  
XP Embedded, WinCE sino 6.0/  
Linux 2.6.9 oppure superiore; Mac OS 10.x
- **Temperatura esercizio :** Da 0°C fino a 55° Celsius
- **Temperatura Ambiente:** Da -40°C fino a 75° Celsius
- **Rel. Umidità:** 5% bis 95%
- **Alimentazione:** 3.3V oppure 5Volt attraverso lo Slot PCI
- **Domensioni:** 122.00 x 80.00 mm
- **Peso:** 550g
- **Confezione:** EX-41088, 1 x Cavo Octopus, CD Driver, Manuale

### Specification

- **Chip-Set:** FTDI
- **Data transfer rate:** 300 Baud up to 921.6KBaud
- **Connectors:** 1 x 63 Pin female connector  
8 x 9 pin serial RS-232 male connector (Octopus cable)
- **Hardware system:** PCI und PCI-X 32-Bit Slot
- **Driver:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)  
XP Embedded, WinCE 4.2, 5.0, 5.2 und 6.0  
Linux 2.6.9 or higher  
Mac OS 10.x
- **Operating Temperature :** 32°F up to 131° Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 3.3V or 5V over the PCI-Slot
- **Size:** 122.00 x 80.00 mm
- **Weight:** 550g
- **Packaging contents:** EX-41088, 1 x Octopus cable, Driver CD, Manual

System / OS

Approvato /Approved

Confezione / Packaging

