




Anwendungen / Application



ExpressCard Bus zu 4 x PCI-Slot Kompakte Expansion-Box

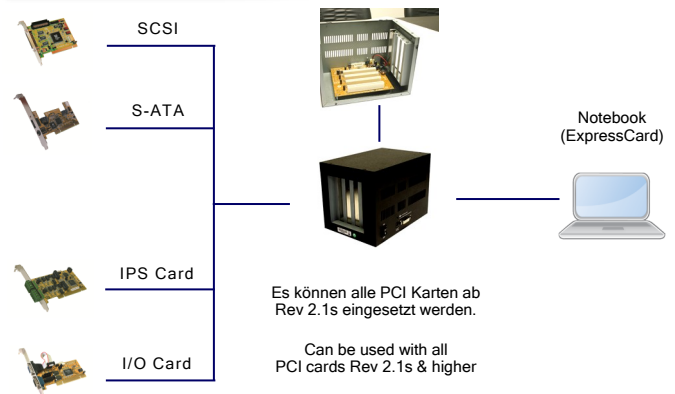

ExpressCard Bus to 4 x PCI-Slot compact Expansion Box

Beschreibung

Die EX-1015 ist speziell entworfen worden um 4 weitere PCI Slot über einen ExpressCard Slot zu erweitern. Die EX-1015 wird einfach mit dem ExpressCard Adapter-Karte an ein Notebook mit ExpressCard Slot angeschlossen. Es ist dann möglich jede im IT Markt erhältlichen Universal PCI Karten über den ExpressCard Bus anzusteuern. Für die EX-1015 sind keine zusätzlichen Treiber nötig. Die Expansion box benötigt ein externes 12V Netzteil. **Achtung!! Die maximale Stromaufnahme pro PCI-Slot ist auf 200mA begrenzt.**

Merkmale

- Erweitert 4 PCI 32-bit 33MHZ Slot's über den ExpressCard Slot
- Unterstützt beide 5V und 3.3V ADD-ON Karten
- PCI Slot's sind PCI Bus Rev. 2.3 konform, ExpressCard Base konform, Spezifikation: Revision 1.0a
- ExpressCard Advanced Error Reporting, Unterstützt Capability Including ECRC
- Robustes Metall Gehäuse. Auch für Industrielle Anwendungen geeignet
- Unterstützt Extended Virtual Channel (VC), Unterstützt Active State Link Power Management
- Unterstützt Wake Event und Beacon
- Benötigt ein 12VDC AC Power Netzteil

Spezifikationen

- **Chip-Set:** Texas Instruments XIO2000A
- **Datentransfer-Rate:** Bis 250Mbytes/Sek., voller ExpressCard Durchsatz
- **Anschlüsse:** 1 x Anschluss an der Expansion Box, 4 x PCI Rev. 2.3
1 x Anschluss an dem PCI-Express Adapter
- **Hardwaresysteme:** ExpressCard 34mm Slot
- **Treiber:** Stellt das OS zur Verfügung
- **Betriebstemperatur :** 0° bis 55° Celsius
- **Lagertemperatur:** -40° bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** Netzteil 36W
- **Abmessung:** 206 (L) x 137 (B) x 143 (H) mm
- **Gewicht:** 1600g
- **Lieferumfang:** EX-1015, ExpressCard Adapter Karte, 70cm Kabel, Netzteil 12V/3A-36W, Handbuch

System / OS



Description

The EX-1015 ExpressCard to Quad PCI Slots Expansion Box is specially designed to expand 4 extra PCI slots from a ExpressCard Slot. It includes a ExpressCard adapter card, a cable and the slot box itself. The box is powered by a 12VDC AC adapter. It provides instant PCI bus expansion via the ExpressCard Bus from the Notebook. **Attention!! The maximum power consumption per PCI slot is limited to 200mA.**

Features

- Expands 4 PCI 32-bit 33MHZ Slots over ExpressCard Slot
- Supports both 5V and 3.3V Add-in Cards
- Fully Compliant with ExpressCard Base, PCI Slots are fully Compliant PCI Bus Rev. 2.3, Specifications, Revision 1.0a
- ExpressCard Advanced Error Reporting, Capability Including ECRC Support
- Metal Case for Critical Applications
- Extended Virtual Channel (VC) Support, Includes a Second VC for Quality-of-Service and Active State Link Power Management Support,
- Wake Event and Beacon Support
- 12VDC AC Power Adapter is Required

Specification

- **Chip-Set:** Texas Instruments XIO2000A
- **Data transfer rate:** Up to 250Mbytes/Sec., Fully ExpressCard throughput
- **Connectors:** 1 x connector by the Expansion Box, 4 x PCI Rev. 2.3
1 x connector by the PCI-Express adapter
- **Hardware system:** ExpressCard 34mm slot
- **Driver:** Provided by operating system
- **Operating Temperature :** 32° up to 131° Fahrenheit
- **Storage Temperature:** -40° up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** Power Supply 36W
- **Size:** 206 (L) x 137 (W) x 143 (H) mm
- **Weight:** 1600g
- **Packaging contents:** EX-1015, ExpressCard adapter card, 70cm cable, Power Supply 12V/3A-36W, Manual

Geprüft / Approved



Verpackung / Packaging

